


Forks with Standard Hooks – ISO/ITA/FEM Mounting

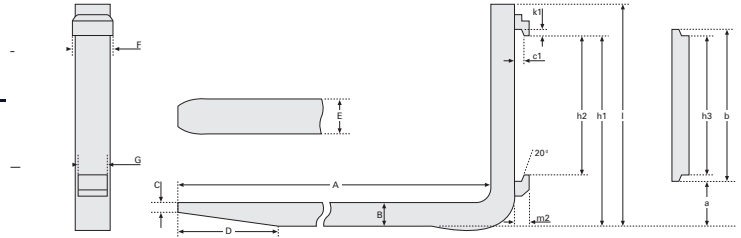

From (customer contact)			Company		
Address					
Email					
Telephone			Date		
To (Attollo contact)					
Notes (qty. required)					

A		useable blade length	B		blade thickness	C		tip thickness (non standard will incur additional charges)
D		taper length (non standard will incur additional charges)	E		blade width	F		top hook width
G		lower hook width	h1		lowest point of top hook to underside of blade	h2		lowest point of top hook to highest point of lower hook
h3		lowest point on forklift carriage	I		shank height reference	a		forklift carriage under clearance reference
b		highest point on forklift carriage	m2		hook thickness	TRUCK CAPACITY		shown on rating plate, include load centre
k1		hook lip height	c1		fork shank to inside edge of hook	REQUIRED CAPACITY		list if different from truck capacity

Customer approval	signature	printed name	date
-------------------	-----------	--------------	------

STANDARD HOOK FORK ARM MOUNTING DIMENSIONS REFERENCE CHART

Class	Capacity kg	Load Centre	a ref.	b ref.	c1 +1 −0	I ref.	h1 ±3	h2		h3		k1 min.	m2 max.		
								dim.	tol.	dim.	tol.				
1A	up to 999	400	76	331	16.5	475	394	306	+1 −0	305	+0 −1	14	26		
1B	up to 999		114			515	432			381					
2A	1000 to 2500	500	76	407	16.5	560	470	382		476	+0 −1.5	17	38		
2B	1000 to 2500		152			635	546			477					
3A	2501 to 4999	500	76	508	22	660	568	477	+1.5 −0	597				20	45
3B	2501 to 4999		203			780	695			598					
4A	5000 to 8000	600	127	635	26	835	743	598							
4B	5000 to 8000		254			965	870								

Talk with your local Kaup representative about your attachment needs



SIDESHIFTING



FORK POSITIONING



CLAMPING



ROTATING / TIPPING



EXTENDING / RETRACTING



MULTI HANDLING



LIFTING



STABILISING

1800 464 712 kaup.com.au
5-11 Helium St Narangba Queensland 4504 Australia
Tel +61 7 3888 1277 Fax +61 7 3888 3838



30 years service to
the local materials
handling industry

