



Pin Type – Shaft Mounted Forks with Inverted Lower Hook

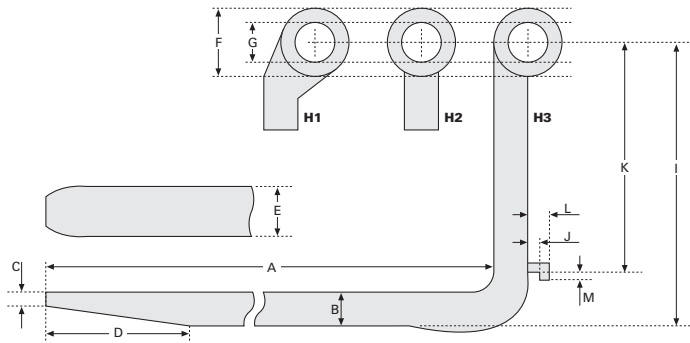

Tube Specifications

If there is no slot in the tube, only dimension R is required.



N		angle of slot
O		depth of slot
P		location of slot
Q		slot width
R		tube length

From (customer contact)		Company	
Address			
Email			
Telephone		Date	
To (Attollo contact)			
Notes (qty. required)			

A		useable blade length	B		blade thickness	C		tip thickness (non standard will incur additional charges)
D		taper length (non standard will incur additional charges)	E		blade width	F		eye outside diameter
G		eye inside diameter	I		back height to pin centre line	J		distance between shank and inside of lower hook
K		inside lower hook to pin centre line	L		lower hook thickness	M		lower hook lip height
H1		OFFSET – centre line of pin to back of fork. DIMENSION REQUIRED	H2		INSET – centre line of pin to back of fork. DIMENSION REQUIRED	H3		INLINE – centre line of pin to back of fork. YES/NO
PIN DIAMETER		existing carriage load pin	TRUCK CAPACITY		shown on rating plate, include load centre	REQUIRED CAPACITY		list if different from truck capacity
TRUCK MAKE					TRUCK MODEL			

Customer approval	signature	printed name	date
-------------------	-----------	--------------	------

Talk with your local Kaup representative about your attachment needs



SIDESHIFTING



FORK POSITIONING



CLAMPING



ROTATING / TIPPING



EXTENDING / RETRACTING



MULTI HANDLING



LIFTING



STABILISING